
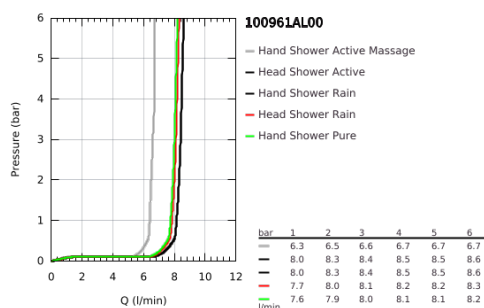


## 10 096 1AL 00 RAINSHOWER AQUA PURE SHOWER SYSTEM WITH SAFETY MIXER FOR WALL MOUNTING

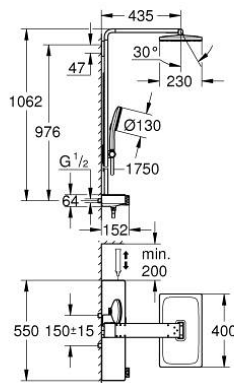

### PRODUCT DESCRIPTION (1/2)

- Colour: brushed hard graphite
- consisting of:
  - horizontal 435 mm shower arm
  - exposed SmartControl thermostat with metal housing
  - allows change between:
    - head shower Rainshower Aqua Duo square 400 x 230 mm, black acrylic spray plate
    - swing angle 0° - 30°
- 2 spray patterns:
  - GROHE PureRain, ActiveRain
  - hand shower Rainshower Aqua 130 (101 676), black acrylic spray plate
- 3 spray patterns:
  - GROHE Rain, Rain+ and ActiveMassage
  - adjustable in height with gliding element
  - initial Rainshower Aqua Pure unit (101 672 9990) enclosed
  - shower hose 1750 mm
  - GROHE Rainshower Aqua Pure removes chlorine and odor (hand shower)
  - GROHE SmartTip showering spray selection via push of a ring
  - GROHE Water Saving - Less water, perfect flow
  - maximum flow rate (at 3 bar): 8.7 l/min
  - GROHE SmartControl with recessed metal buttons, push for ON-OFF, turn for volume adjustment from GROHE Water Saving to full flow
  - GROHE ProGrip Metal with knurl structure
  - GROHE TurboStat compact cartridge

## 10 096 1AL 00 **RAINSHOWER AQUA PURE SHOWER SYSTEM WITH SAFETY MIXER FOR WALL MOUNTING**

### PRODUCT DESCRIPTION (2/2)

- GROHE SafeStop safety button at 38&deg;C
- GROHE SafeStop Plus optional temperature limiter at 43°C included
- integrated GROHE EasyReach shower tray (black glass)
- GROHE DreamSpray perfect spray pattern
- GROHE Long-Life finish
- SpeedClean anti-lime system
- Inner WaterGuide for a longer life
- TwistStop to prevent hose from twisting
- GROHE CoolTouch prevents scalding on hot surfaces
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min.
- minimum pressure 1.0 bar
- internal 6 V lithium battery (42 886 000) type CR-P2
- battery lifetime approx. 10 years
- replacement filter: Rainshower Aqua Pure unit (101 672 9990)
- optional: Rainshower Aqua glass shelf (101 677)
- to change the filter, a minimum distance of 20 cm from the right-hand side wall must be maintained