


## 39 684 00F UNISET SLIM ELEMENT FOR WC WITH FLUSHING CISTERN 88.9 MM



### PRODUCT DESCRIPTION (1/2)

- inlet and outlet connecting set
- cistern volume 6 l
- angle valve 15 mm (½")
- 2 WC fixing bolts
- distance of fixing bolts 180/230 mm
- GROHE Water Saving - Less water, perfect flow
- Shortable inspection shaft incl. protection during construction phase, for vertical use
- for mounting of small flush plates revision shaft 40 949 000 to be ordered separately
- flushing cistern SLIM, 3 - 6 l, containing following features:
  - water supply from top

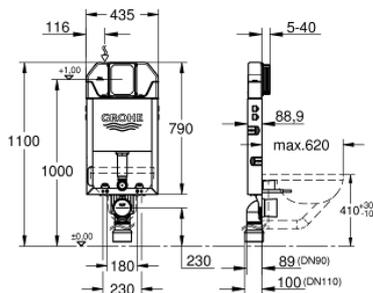

Pure Freude  
an Wasser



## 39 684 00F **UNISSET SLIM ELEMENT FOR WC WITH FLUSHING CISTERN 88.9 MM**

### **PRODUCT DESCRIPTION** (2/2)

- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- optional flow manager please order separately
- for on-the-wall installation wall brackets 39 699 000 need to be ordered separately
- adjustment ex factory 4.5 l and 3 l